

EVERKOTE 300

Reactive Inorganic Mineral Paints & Stains



Photo: *EverKote 300 Patinar* during installation over custom pre-cast concrete panels.

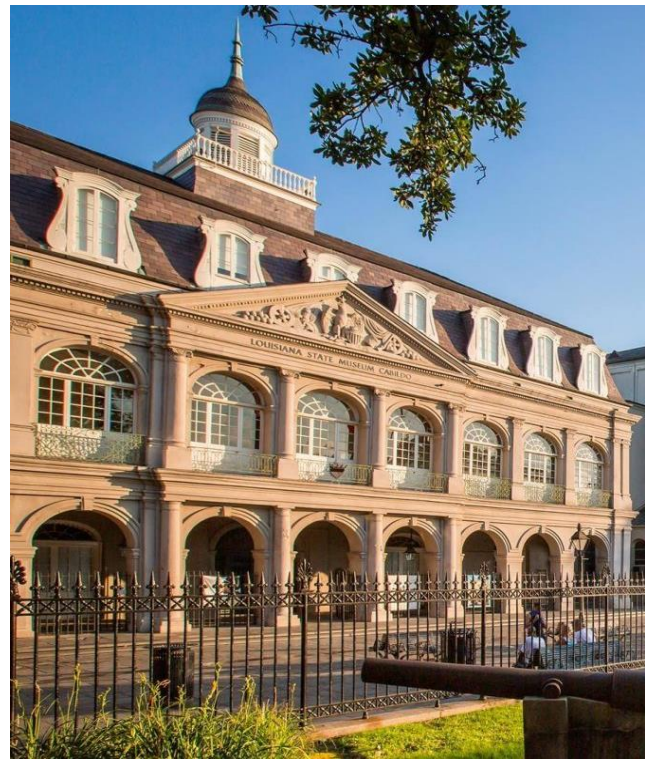


Photo: Cabildo Museum, New Orleans, LA. *EverKote 300 Patinar* application over stone.



Photo: Merritt Parkway, Trumbull, CT. *EverKote 300 Patinar* application over new concrete to match historic color.

DESCRIPTION:

EverKote 300 mineral coatings are waterborne inorganic paints and stains based on reactive potassium silicate binders. Potassium silicate masonry paints have been in use for over a century to provide extremely durable, breathable color coatings on all types of mineral-based substrates, including stone, masonry, concrete, and cement plaster (stucco).

Two standard grades of are available:

Grade	Description
Penetral	Low-Viscosity, Opaque or Semi-Transparent Stains
Patinar	Medium-Viscosity, Opaque Coatings

EverKote 300 coatings are stabilized, reactive formulations which form chemical bonds within the substrate to provide long term durability.

HOW DO *EverKote 300* POTASSIUM SILICATE COATINGS WORK?

EverKote 300's potassium silicate binder is produced by fusing potassium carbonate with silica at high temperature. The result is a soluble silicate, which can be dissolved in water to produce a liquid "waterglass".

Although soluble silicates can be air dried to form a film, maximum water resistance, bond strength and long-term durability depend on chemical reactions with the substrate or added catalysts. Substrates with which silicates can react include:

- Calcium salts, typically found in portland cement, lime and calcareous natural stones such as limestone and marble
- Silica, typically present in siliceous sandstones, silica sand, mortars, stucco, concrete, and glass
- Ceramics, including brick and terra cotta
- Iron, aluminum, and other metals

When *EverKote 300* is applied to suitable substrates, it penetrates and reacts to form a hard, insoluble silicate.

When applied to materials containing portland cement, the silicate reacts with incompletely hydrated cement particles, converting unreacted calcium hydroxide [Ca(OH)₂ or hydrated lime] to hard calcium silicate hydrates.

APPEARANCE:

EverKote 300 can be matched to any fan deck color or Custom Color-Matched to provided samples. Product dries to a flat (matte) finish.

PROPERTIES:

- Exceptionally Breathable
- Moisture and Immersion Resistant
- Does not contribute to growth of mold, algae, or mildew
- Improves resistance to certain chemicals
- Durable and UV-Resistant; Does not yellow or peel
- Heat Resistant

APPLICATION:

Always pre-test a small, inconspicuous area for color, adhesion, and compatibility prior to large scale application. Allow up to 7 days cure before judging final color. Previous treatments, water repellents, chemical cleaning agents, and substrate composition can affect mineral coating reaction rates and appearance. Mineral coatings are natural materials and some color variation or shading is normal. Colors may lighten somewhat with aging.

EverKote 300 typically requires two coats. The first coat may be thinned with up to 10% *EverKote 300 Dilution*, followed by one undiluted *EverKote 300* top coat, to achieve opaque finishes. Different levels of transparency can be achieved by dilution at any percentage with *EverKote 300 Dilution*. On rough or porous substrates, topcoats may also be diluted to maintain the target coverage rate of 200 sq.ft./gallon. **Do not over-apply.**

PROPERTY	RESULT	COMMENTS
Tensile Bond Strength (ASTM D4541)	>410 psi @ 48 hr cure	No adhesive failure; 100% cohesive substrate
Flexural Bond Strength	>1440 psi @ 13 day cure	No adhesive failure; 100% cohesive substrate
Water Vapor Transmission (ASTM E96)	93 perms	3 specimens; 12 mil DFT at 74°F and 50% RH
Accelerated Weathering (ASTM G53)	1000 hrs; no peeling, cracking, yellowing, or swelling	Stable
Volume Solids (ASTM D2697)	28%	None
Resistance to Wind Driven Rain (ASTM D6904)	Weight Gain = 28 grams; No visible water	3 specimens; 200 sq ft/gal, 10 day cure at 75°F and 50%RH

Surface Preparation

Surfaces to be treated must be clean, dry and free of dirt, dust, form oil, efflorescence, previous coatings (other than existing cement or silicate mineral coatings) and other materials which may hinder penetration and/or reaction with the substrate. Previous cementitious and silicate mineral coatings must be spot tested for compatibility in an inconspicuous area prior to large scale application. Highly porous substrates may require consolidation or *EverKote 300 Primer* prior to coating.

CAUTION: Protect glass and other surfaces not intended to be coated by covering completely with polyethylene, sealing the edges continuously with heavy moisture resistant tape. Unprotected glass and other surfaces may be etched or “frosted” by contact with silicate coatings. This is a chemical reaction, which cannot be reversed by cleaning.

New Concrete, Stucco and Mortar must be allowed to cure for a minimum of 7 days prior to mineral coating application. For maximum effectiveness, surfaces must be sufficiently dry to allow the mineral binder to penetrate porous substrates. Allow extended drying time as required under cool, damp conditions.

Factors Affecting Penetration Depth

While penetration depth may not be critical for many architectural applications, greater penetration has a significant effect on strength and durability of

applications on cement-based substrates, porous stone and traffic surfaces. Penetration is influenced by substrate pore structure and permeability, moisture content and surface preparation.

Installation

Mix product thoroughly before use as contents may settle upon standing. Re-mix periodically during use to maintain consistent color and saturation.

Apply *EverKote 300* by brush, roller or airless spray. Apply as a continuous film and do not attempt to overbuild the wet film to fill surface imperfections. Different batches of material should be “cut” to an edge or separation, according to common coating practice. Application by airless sprayer will require a minimum 0.031 inch tip.

Allow first coat to dry for a minimum of 6 hours at 72°F and 50%RH before topcoat application of *EverKote 300*. Cure time between coats will vary with different weather conditions.

Minimum application temperature is 40 °F (4 °C).

Coverage Rate: 200 sq ft/gal per coat

Air, surface, and product temperatures must all be considered when working at or near marginal conditions. Drying is affected by atmospheric humidity and air movement, so drying times may be greatly extended under cool, damp conditions.

Protection & Curing

Protect coated surfaces from rain or other water exposure for at least 24 hours after application. Full cure requires at least 7 days, and colors may change in hue or intensity during this period. Do not expose treated surfaces to acid cleaners, hot water or steam cleaning.

Safety & Handling:

Carefully read and observe all safety and handling guidelines as detailed in the Safety Data Sheets supplied with this product.

Although *EverKote 300* is low in odor, use with adequate ventilation. Use organic vapor/mist respirator when spraying. Take proper precautions to prevent overspray or vapors from being drawn into air intake systems.

KEEP FROM FREEZING

FOR COMMERCIAL & INDUSTRIAL USE ONLY



Revised: 03/2022

3 Northwest Drive, Plainville, CT 06062

Phone: (860) 747-2220 or (800) 341-6621

E-mail: chad@edisoncoatings.com

Fax: (860) 747-2280 or (866) 658-1189

Internet: www.edisoncoatings.com

Edison Coatings products are for commercial use only. In case of defect in manufacture or packaging, materials will be replaced at no cost. No other warranty, except for such replacement, express or implied, is in effect. Any implied warranty of merchantability or fitness for a particular purpose is expressly disclaimed. Although information and advice supplied in this publication are believed to be reliable, they do not represent performance specifications and no obligation or liability is assumed for advice given or results obtained. Product formulations and performance characteristics are subject to change without notice. Other conditions and limitations may be imposed at time of sale.